

AV-7 3W 200°





FLICKER FREE



SYSTEM LIGHTING:



laying hens and breeding animals



pullet

LED illuminators for indoor nests made of opaline polycarbonate to ensure maximum light distribution. Small dimensions for a minimum of space and free cable mounting system make this product of extreme versatility to cover every lighting need.

The device provides IP67 protection and the use of self-extinguishing material for maximum plant safety.


ELECTRICAL CHARACTERISTICS

PRODUCT	CODE	POWER CONSUPTION	COLOUR TEMPERATURE	LUMINOUS FLUX	LUMINOUS EFFICACY	BEAM ANGLE	SUPPLY VOLTAGE AVI-DIMM	COLOUR RENDERING INDEX	DIMMING	DURATION
AV-7	HT-8-830-00552	3W	Full Spectrum 3000 K	225 lm	75 lm/W	200°	48 VDC	>95	1%-100%	50.000h

MECHANICAL CHARACTERISTICS



PRODUCT	CODE	BODY MATERIAL	OPERATING TEMPERATURE	IP RATING	WEIGHT Kg	DIMENSIONS (mm)	Normative references CEI EN
AV-7	HT-8-830-00552	PMMA OPALE	-25 °C / +40 °C	IP 67	0,1	D 55 X H 42	60598-1 / 605982-1/2 / 61347-2-13 62031 / 61547 / 55015

light intensity distribution graph

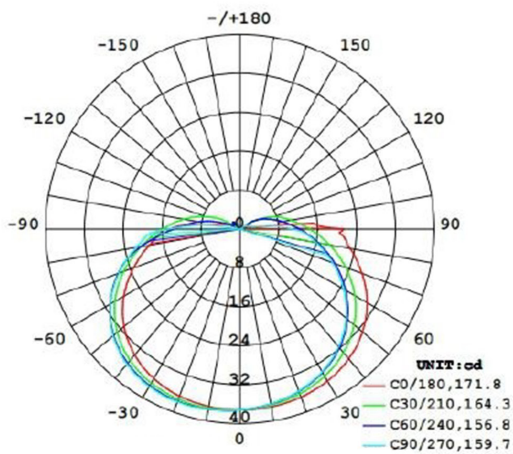

average beam angle (50%): 163.1 DEG

isolux planax graph (UNIT: lx)

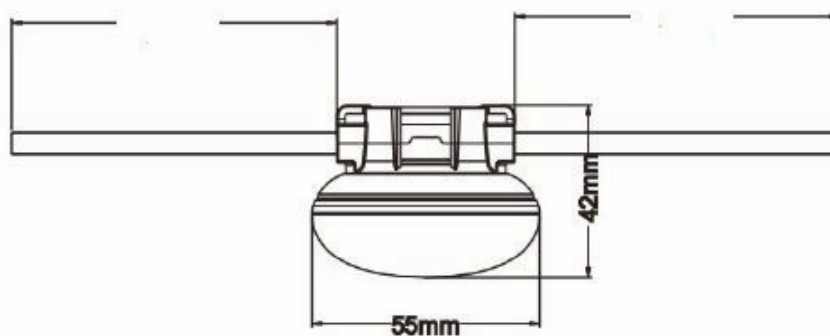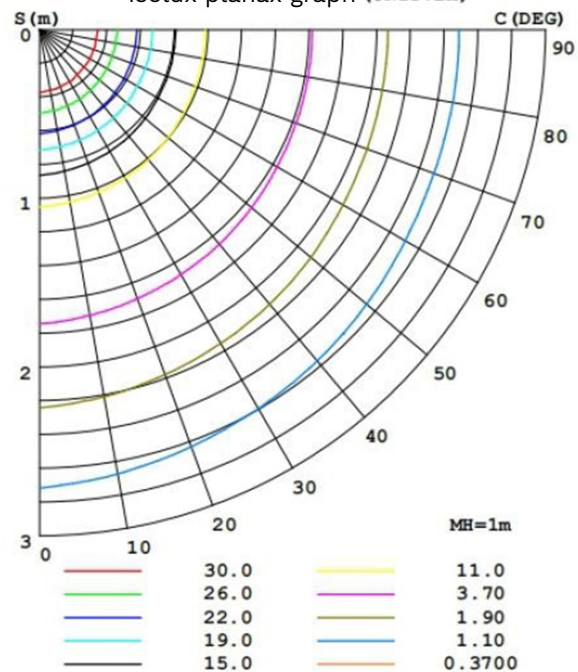

POWER SUPPLIES ACCESSORIES

CAVO LAMPADA AV7
ALIMENTATORE DV500 DRIVER 48VDC 500 DIMM 0-10
ALIMENTATORE DV360 DRIVER 48VDC 360 DIMM 0-10